


PROJECTION SCREENS

Recessed Motorized Wi-Fi screens

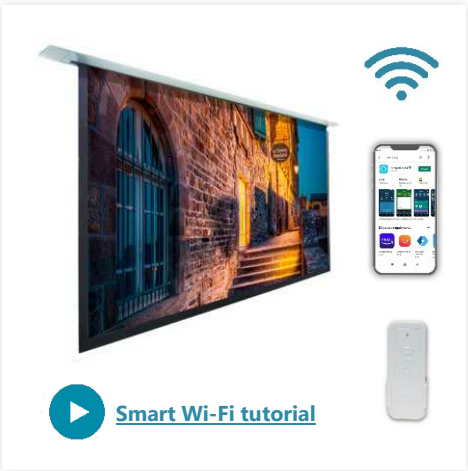

The KIMEX recessed motorized Projection screen offers a high-quality image (HD resolution) in 4:3, 16:9, and 16:10 formats, ideal for broadcasting all of your content in a business environment or at home.

Fabric

This screen features matte white PVC fabric (1.05 gain) with blackout backing, an adjustable backdrop to adapt to all your configurations, and a black border so you can enjoy the best possible contrast and image rendering. With a thickness of 0.42mm, the screen offers a viewing angle of 165°.

Control solutions

This functional screen offers several control solutions to operate it according to your needs: two remote controls (radio frequency (RF) and infrared (IR)), a wall switch, and a 12V trigger connection to connect your video Projection.

Wi-Fi

Your screen can also be controlled by Wi-Fi either with an app or by voice command via a home automation system.

Adjustment of the stops

For optimal user comfort, you can easily set and memorise the stop points for the motor. When you press the down button on your remote control, the screen stops automatically at the level set.


Tubular motor

The motor is completely invisible, quieter and more reliable than a synchronised motor. The power outlet is located on the left side of the casing.

Casing

This screen consists of an aluminum casing with a modern design that is easy to install, specially designed to be fitted in a false ceiling. Remember to provide an inspection hatch for any interventions to the motor and connectors.

Screen supplied as standard with a ceiling mounting kit including 4 x 1-meter threaded rods.
False ceiling height: 113 cm maximum

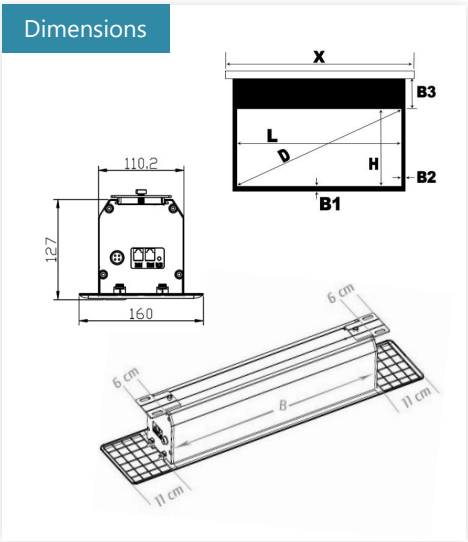

TECHNICAL SPECIFICATIONS

Reference	Aspect ratio	Image size Width W x Height H (cm)	Diagonal D cm (inches)	Black border B1/B2 (cm)	Blackdrop B3 (cm)	Total fabric dimensions Width x Height (cm)	Casing colour	Built-in dimensions Length x Width x Height (cm)	Dimensions of visible part Length x Width (cm)	Screen weight (kg)	Packaging dimensions (cm)
048-1502W	4:3	200 x 150	250 (98)	4	45	208 x 199	□	239 x 12 x 13-113	250 x 16	18	236 x 22 x 19
048-1503W		220 x 165	275 (108)			228 x 214		259 x 12 x 13-113	270 x 16	19	255 x 22 x 19
048-1504W		240 x 180	300 (118)			248 x 229		279 x 12 x 13-113	290 x 16	20	275 x 22 x 19
048-1505W		260 x 195	325 (128)	268 x 244		299 x 12 x 13-113		310 x 16	21	295 x 22 x 19	
048-1506W		280 x 210	350 (138)	292 x 261		319 x 12 x 13-113		330 x 16	22	319 x 22 x 19	
048-1507W		300 x 225	375 (148)	312 x 276		339 x 12 x 13-113		350 x 16	24	339 x 22 x 19	
048-1508W	16:9	320 x 240	400 (157)	6		332 x 291		359 x 12 x 13-113	370 x 16	25	359 x 22 x 19
048-1511W		180 x 101	206 (81)		60	186 x 165		219 x 12 x 13-113	230 x 16	14	214 x 22 x 19
048-1512W		200 x 113	229 (90)			208 x 177		239 x 12 x 13-113	250 x 16	16	236 x 22 x 19
048-1513W		220 x 124	252 (99)	228 x 188		259 x 12 x 13-113		270 x 16	17.5	258 x 22 x 19	
048-1514W		240 x 135	275 (108)	248 x 199		279 x 12 x 13-113		290 x 16	19	276 x 22 x 19	
048-1515W		260 x 146	298 (117)	268 x 210		299 x 12 x 13-113		310 x 16	20	296 x 22 x 19	
048-1516W	280 x 158	321 (126)	6	292 x 224		319 x 12 x 13-113		330 x 16	21.5	320 x 22 x 19	
048-1517W	300 x 169	344 (136)		312 x 235		339 x 12 x 13-113		350 x 16	23	340 x 22 x 19	
048-1518W	320 x 180	367 (145)		332 x 246		359 x 12 x 13-113		370 x 16	24.5	360 x 22 x 19	
048-1532W	16:10	200 x 125	236 (93)	4		208 x 189		239 x 12 x 13-113	250 x 16	18	235 x 22 x 19
048-1533W		220 x 138	260 (102)			228 x 202		259 x 12 x 13-113	270 x 16	19	253 x 22 x 19
048-1534W		240 x 150	283 (111)			248 x 214		279 x 12 x 13-113	290 x 16	20	275 x 22 x 19
048-1535W		260 x 163	307 (121)	268 x 227		299 x 12 x 13-113		310 x 16	21	296 x 22 x 19	
048-1536W		280 x 175	330 (130)	6		292 x 241		319 x 12 x 13-113	330 x 16	22	319 x 22 x 19
048-1537W		300 x 180	354 (139)			312 x 246		339 x 12 x 13-113	350 x 16	23	339 x 22 x 19
048-1538W	320 x 200	377 (148)	332 x 266			359 x 12 x 13-113		370 x 16	25	359 x 22 x 19	